

**CMS College Kottayam ( Autonomous)**

**Dated : 05-02-2018**

**Tenders are invited for Maintenance Work of Class Rooms of the college under PD Accumulated fund Utilization Scheme**

**Important Dates:**

Issue of Tender Forms	:	05-02-2018 to 22-02-2018 (11.00 am)
Last date of receipt of tenders:		22-02-2018 3.00 pm
Opening of tenders	:	22-02-2018 3.30 pm

**Tender Cost:**


- Above `1,00,000/- upto `10.00 lakh- 0.2% of the cost of tender rounded to the nearest multiple of 100, subject to a minimum of ` 400/- and maximum ` 1500/- + GST (@ 12% - CGST-6% and SGST -6%)
- Above `10.00 lakh- 0.15% of the cost of tender rounded to the nearest multiple of 100, subject to a maximum of ` 25000/- + GST (@ 12% - CGST-6% and SGST -6%)

**The GST amount should be paid by the renderers and the receipt of the same should be provided at the time of purchase of tender form.**

EMD: A cash deposit as earnest money equal to one percent of the total cost


Kottayam



  
**PRINCIPAL CMS COLLEGE**  
**PRINCIPAL**  
**C.M.S COLLEGE KOTTAYAM**

ESTIMATION FOR MAINTENANCE WORK AT C.M.S COLLEGE, KOTTAYAM  
ABSTRACT ESTIMATE

Item no	Description of work	Quantity	Unit	Rate	Amount
1	Demolishing work including removal and disposal of materials from campus	LS			
2	Ceiling plastering with CM 1:3, 9mm thick 1 coat under side of slab, beam etc floated hard & trowelled smooth including watering, curing, scaffolding, all labour charges and cost and conveyance of all materials etc complete for outside at ground floor	33.55	m <sup>2</sup>		
3	Ceiling plastering with CM 1:3, 9mm thick 1 coat under side of slab, beam etc floated hard & trowelled smooth including watering, curing, scaffolding, all labour charges and cost and conveyance of all materials etc complete for inside at ground floor	43.68	m <sup>2</sup>		
4	Plastering with CM 1:5, 12mm thick 1 coat floated hard & trowelled smooth including watering, curing, scaffolding, all labour charges and cost and conveyance of all materials etc complete for inside walls at ground floor	132.68	m <sup>2</sup>		

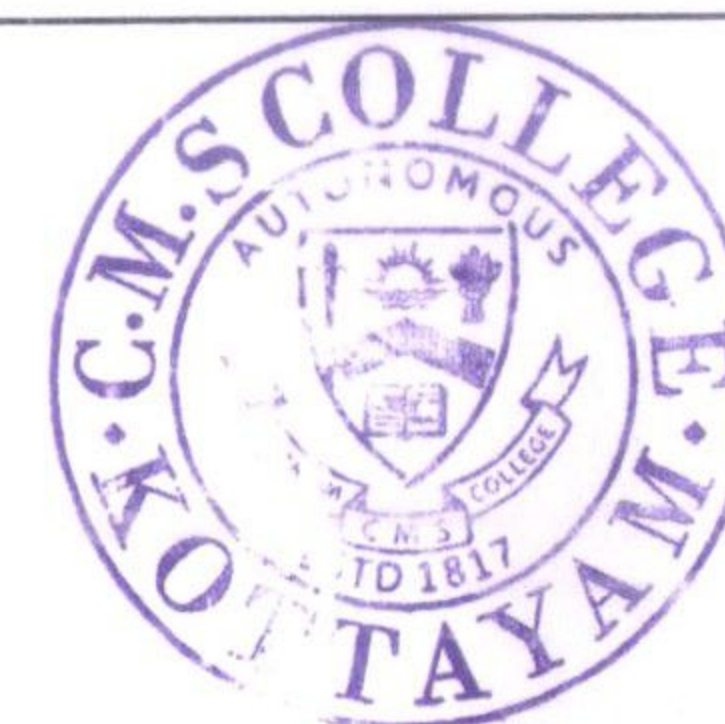

PRINCIPAL  
C.M.S COLLEGE KOTTAYAM

5	Ceiling plastering with CM 1:3, 9mm thick 1 coat under side of slab, beam etc floated hard & trowelled smooth including watering, curing, scaffolding, all labour charges and cost and conveyance of all materials etc complete for outside at first floor	46.75	m <sup>2</sup>
6	Ceiling plastering with CM 1:3, 9mm thick 1 coat under side of slab, beam etc floated hard & trowelled smooth including watering, curing, scaffolding, all labour charges and cost and conveyance of all materials etc complete for inside at first floor	16.35	m <sup>2</sup>
7	Plastering with CM 1:5, 12mm thick 1 coat floated hard & trowelled smooth including watering, curing, scaffolding, all labour charges and cost and conveyance of all materials etc complete for inside walls at first floor	76.06	m <sup>2</sup>
8	Ceiling plastering with CM 1:3, 9mm thick 1 coat under side of slab, beam etc floated hard & trowelled smooth including watering, curing, scaffolding, all labour charges and cost and conveyance of all materials etc complete for inside at second floor	12.36	m <sup>2</sup>



PRINCIPAL  
C.M.S COLLEGE KOTTAYAM

9	Plastering with CM 1:5, 12mm thick 1 coat floated hard & trowelled smooth including watering, curing, scaffolding, all labour charges and cost and conveyance of all materials etc complete for inside walls at second floor	42.23	m <sup>2</sup>
10	Supplying and fixing fully glazed window with 63mmX115mm side frame and 50mmX115mm intermediate verticals in anjiliwood side frames clamped on to sides, mahagoniwood shutter frames 4mm thick plain glass with brass hinges, adjustable wind appliance hooks and eyes etc. including enamel paint over 1 coat of wood primer.	2.88	m <sup>2</sup>
11	Providing one coat of white cement for ceiling and walls	396.98	m <sup>2</sup>
12	Providing border	5.00	m

**TOTAL**

**NB: The above mentioned area is of various small segments not belong to a single section**



*[Signature]*  
**PRINCIPAL**  
**C.M.S COLLEGE KOTTAYAM**